

Industrial Network Security Systems



Be certain. Belden.

Firewall solutions uniquely designed and certified to protect your assets in hardened industrial conditions.



TOFINO SECURITY A BELDEN BRAND





Belden's Industrial Network Security Systems are Designed to Protect Your Assets.

No business or industry is safe from attack. Whether intentional or accidental, threats can come at the hands of internal personnel or external hackers. Either way, an unprotected network puts your enterprise at risk.

While industrial-grade switches and routers provide many security features, you need industrial firewalls to control communication between devices and secure communication across the entire network.

Page	
EAGLE One Industrial Firewall/VPN Router System	3
Tofino Xenon Security Appliance	4
EAGLE20/30 Multiport Industrial Firewall System	5

You can depend on us to keep your critical infrastructure secured by Industrial Network Systems from Belden.

Firewalls represent an indispensable tool for network security.



EAGLE One Industrial Firewall/VPN System

The Gold Standard for Industrial Firewalls

Key Benefits

Layer 2 and Layer 3 stateful inspection firewall. Helps you segment your network for powerful defense-in-depth protection.

Redundant backbone network connections for production cells. Easily connect to the backbone via Network Address Translation (NAT) and Router Redundancy and engage the innovative Firewall Learning Mode (FLM) for smooth start-up based on recognized network traffic patterns.

Safe and cost-effective protection of automation networks.

- Supports static IPv4 routing and Fast Ethernet (10/100 Mbits/s) ports, either fiber or copper
- Operates transparently to redundancy methods (RSTP and Hirschmann Redundant Ring Coupling in Layer 2 mode)
- Offers both router redundancy with stateful packet inspection and NAT failover in Layer 3 mode
- Supports multiple transmission and encryption standards, including PPPoE, PPP for modem dial-up, IKEv1/v2, IPsec and NAT
- Integrates easily into remote service concepts, enabling you to control VPN connections via digital input

User-friendly configuration and diagnostic options. Graphical User Interface works with other Hirschmann tools such as Industrial HiVision, HiView and HiDiscovery, making the EAGLE One the most desirable configuration and diagnostic industrial security appliance the market has to offer.

Built to withstand harsh industrial environments. Certified by Germanischer Lloyd for offshore and renewable energy use and compliant with IEC 61850-3 for substations and ATEX and ISA 12.12.01 HazLoc for potentially explosive operations.

Target Applications

- Electrical substations
- Power transmission and distribution
- Renewable energy offshore platforms, wind farms
- Transportation road, rail, shipping
- Mechanical and plant engineering
- Oil & gas operations







Tofino Xenon Security Appliance

Advanced Firewall Designed Especially for Industrial Control Network Protection

Key Benefits

Layer 2 security appliance, not just a firewall. Prevents problems inside a network from proliferating and spreading around the network and acts as a bridge so engineers don't have to make major IP address and network changes as with other router security devices.

Advanced filtering and firewalling with a technology called Deep Packet Inspection (DPI). Identifies and distinguishes different data types to determine what will be allowed to pass; available for the most common protocols, including EtherNet/IP, Modbus, OPC.

Designed for minimal disruption. Two things accomplish this:

- Arrives in a passive mode. Undetectable to the network until your controls engineer configures it; can be added to a running network without shutdown
- Offers a Test Mode. Enables your engineer to test firewall rules without actually affecting the network

Built to withstand harsh industrial environments. Certified by Germanischer Lloyd for offshore and renewable energy use and compliant with IEC 61850-3 for substations and ATEX and ISA 12.12.01 HazLoc for potentially explosive operations.

Target Applications

- Electrical substations
- Power transmission and distribution
- Renewable energy offshore platforms, wind farms
- Oil & gas operations
- Mechanical and plant engineering
- Transportation road, rail, shipping









EAGLE20/30 Multiport Industrial Firewall System

Advanced Security Features and Built-in HiSecOS Software Eliminate the Need for Multiple Routers

Key Benefits

Multiple ports offer high flexibility and cost saving. Comes with up to 8 ports, including 2 x Gigabit, 4 x Fast Ethernet and 2 x SHDSL, to allow you to use a single device for multiple purposes like firewalling with Fast Ethernet ports, filtering with Gigabit ports and WAN communication using SHDSL ports.

Ruggedized design for every Industrial application. Fanless design and extended temperature range approved for almost all industrial environments so you can put this Layer 3 firewall anywhere near the control systems.

External Interfaces for fault finding and recovery. Additional interfaces like USB, SD Card, V.24, Digital I/O, etc. allow faster fault finding and make it possible to revert to normal state by using backward files and logs saved on the device through external interfaces.

Defense in Depth at Layer 3 by combining Filtering and Deep Packet Inspection. Uses Stateful Packet Inspection (SPI) and ACLs to protect your network from any unauthenticated source; uses Deep Packet Inspection to analyze each packet and allow only authenticated packets to pass through the network.

NAT (Network Address Translation). EAGLE20/30 is used with NAT to define duplicate address range for similar production cells.



Target Applications

- Automotive
- Machine building
- Process automation
- Transportation
- Water/wastewater
- Food and beverage
- General manufacturing
- Oil and gas operations
- Energy
- Custom interface environments
 LAN, SHDSL, cellular LTE (4G)/3G






Firewall Features at a Glance

Туре	EAGLE One	Tofino Xenon	EAGLE20/30
Physical			
Number of 100Mb/s Ports	2	2	4
Number of 1Gb/s Ports	-	-	2
Serial Port	1	✓	✓
Redundant Power Supply	✓	✓	✓ ✓
Relay Contact	1	1	
Digital Input		_	
ACA20 (USB)	1		
ACA30 (SD)	_		
Voltage	9.6 to 60 V DC, 18 to 30 V AC	9.6 to 60 V DC, 18 to 30 V AC	18 to 60 V DC, 48 to 320 V DC, 88 to 265 V AC
Operating Temperature	0 °C to +60 °C, -40 °C to +70 °C	0 °C to +60 °C, -40 °C to +70 °C	0 °C to +60 °C, -40 °C to +70 °C
Dimensions (W x H x D)	60 x 145 x 125 mm	60 x 145 x 125 mm	98 x 164 x 120 mm
Weight	660 g	600 g	1500 g
Protection Class	IP20	IP20	IP30
Certifications	IF20	IF20	1F30
cUL508			
Germanischer Lloyd			
EN 60950			
EN 61850-3	<i>✓</i>		
IEEE 1613			
ISA-12.12.01 Class 1 Div 2	✓ ✓	/	
NEMA TS 2	-	-	
EN 50121-4	<i>s</i>		
Firewall			
Stateful Packet Inspection Firewall	✓ √	√	√
Layer 3 Firewall	✓	-	✓
Layer 2 Firewall	✓ <i>✓</i>	✓ <i>✓</i>	🖌 (ACLs only)
Firewall Rules Using IP and MAC Addresses in the Same Rule	-		
User Firewall Accounts	✓	-	-
Access Control Lists	-	-	✓
Configurable Default Policy (Accept/Drop/Reject)	-	-	✓
Denial of Service Prevention	✓	 ✓ 	✓
Rate Limiting	✓	✓	✓
Firewall Learning Mode	J	✓	✓
Deep Packet Inspection	-	✓	✓
Preconfigured Rules for Industrial Protocols	-	✓	_
Preconfigured Rules for Industrial Devices	_	J	-
Asset-based Firewall Configuration	_	✓	-
Time	·		
NTP Client/Server		_	
SNTP Client/Server		_	_
NAT	· · ·		
1:1 NAT		_	
Port Forwarding		_	
IP Masquerading			
Double NAT	-		
Security			· · · · · · · · · · · · · · · · · · ·
User Management		_	
Password Policy	-		
Limited Login Attempts	-	-	
SNMP v1/2/3, HTTPS, SSH	✓ ✓		
HTTPS Certificate Import via Web Interface	-	_	



Туре	EAGLE One	Tofino Xenon	EAGLE20/30
Security (continued)		· · · · · · · · · · · · · · · · · · ·	
RADIUS Authentication		_	
Encrypted Configuration File	_	_	
Persistent Log Files			
Login Banner			
Editable CLI Prompt	-		
IP Access Restriction SSH/HTTPS/SNMP			
Operation without IP Address	-		
Switch	_	_	
VLANs	_	_	
Static MAC Addresses			
Configurable Aging Timer			
Prioritization			
		-	
802.1D/p Mapping	-		v
Router			
Static Routing			
Port Based Routing			
VLAN Based Routing			
Secondary IP Interface Addresses/Multinetting	✓		
VRRP	-		
OSPF	-	_	✓
PPPoE		-	-
VPN			
IPSec VPNs		-	
OpenVPN	-	-	-
Redundancy			
Layer 2 Redundancy	√	/	-
Router Redundancy	✓	-	_
Logging			
Event Log	✓		
Syslog	✓		
Audit Trail	-	-	✓
Management			
Industrial HiVision		-	
Central Management Platform	-	✓ ✓	-
Multiple Device Simultaneous Configuration		-	✓
SNMP Traps	✓ <i>✓</i>	-	✓ ✓
LLDP	✓	_	✓
Port Statistics	J	-	✓
Port Configuration Check	✓ ✓	_	✓
Configuable Device Status Levels	J	_	✓
Self Tests		-	_
Device Status Alarm	I	-	I
HiDiscovery		_	
Management VLAN		_	1
Undo Modification of Changes		_	
Multiple Stored Configuration Files		_	
Automatic Software Updates	_	_	
Port Auto Power Down	_	_	
Store Two Versions of Firmware			
Servers			· · · · · · · · · · · · · · · · · · ·
DHCP Server		_	_
DHCP Selver DHCP Relay Agent			
DNS Server			
DynDNS	✓	_	-



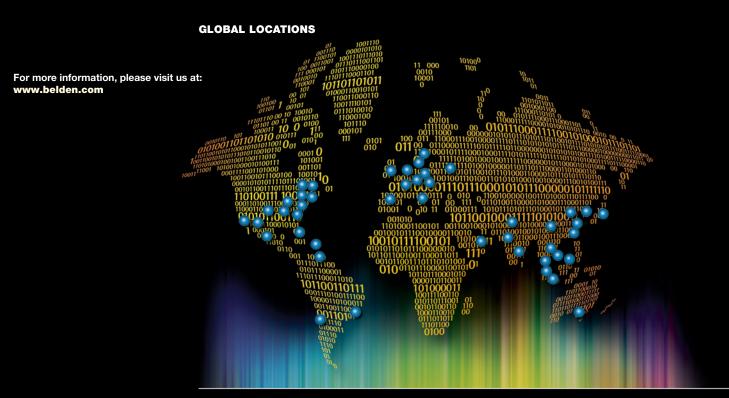

Be certain you stay in touch.

UNITED STATES

Division Headquarters – Americas

2200 U.S. Highway 27 South Richmond, IN 47374 Phone: 765-983-5200 Inside Sales: 800-235-3361 Fax: 765-983-5294 info@belden.com

Belden

2200 U.S. Highway 27 South Richmond, IN 47374a

Inside Sales: 1-800-BELDEN-1 (1-800-235-3361)

www.belden.com

Phone: 765-983-5200 Fax: 765-983-5294 info@belden.com

Industrial Networking (Hirschmann/GarrettCom/

Tofino Security) 255 Fourier Ave. Fremont, CA 94539, USA

Phone: 510-438-9071 Fax: 510-952-3456 www.belden.com gciepofr@belden.com

National Business Center

CANADA

2280 Alfred-Nobel Suite 200 Saint-Laurent, QC Canada H4S 2A4

Phone: 514-822-2345 Fax: 514-822-7979

LATIN AMERICA and the CARIBBEAN ISLANDS

Regional Office 6100 Hollywood Boulevard

Suite 110 Hollywood, Florida 33024

Phone: 954-987-5044 Fax: 954-987-8022 salesla@belden.com

om manchester.salesinfo@belden. com

Location Neckartenzlingen – Stuttgarter Straße 45-51 72654 Neckartenzlingen Germany

Division Headquarters – EMEA

5928 PG Venlo, 5900 AA,

Fax: +31-773-878-448

Regional Offices

Manchester M22 5WB

Fax: +44-161-4983762

Phone: +44-61-4983749

Manchester International Office

Centre, Suite 13 Styal Road

United Kingdom

Phone: +31-773-878-555

venlo.salesinfo@belden.com

www.beldensolutions.com

Edisonstraat 9

The Netherlands

Postbus 9

Phone: +49-(0)-712714-0 Fax: +49-(0)-7127/14-1313 inet-sales@belden.com

EUROPE/MIDDLE ASIA-PACIFIC EAST/AFRICA

Division Headquarters – APAC

7/F Harbour View 2 16 Science Park East Avenue Hong Kong Science Park Shatin, Hong Kong

Phone: 852-2955-0128 Fax: 852-2907-6933 hongkong.sales@belden.com

Regional Offices

Unit 301 No. 19 Building, 1515 Gu Mei Road Caohejing High-tech Park Shanghai 200233 People's Republic of China

Phone: 021-54452388 Fax: 021-54452366/77

hongkong.sales@belden.com 101 27 International Business

Park #05-01 iQuest @ IBP Singapore 609924

Phone: 65-6879-9800 Fax: 65-6251-5010 singapore.sales@belden.com

Belden, Belden Sending All The Right Signals, GarrettCom, Hirschmann, Lumberg Automation, Tofino Security, Tripwire and the Belden logo are trademarks or registered trademarks of Belden Inc. or its affiliated companies in the United States and other jurisdictions. Belden and other parties may also have trademark rights in other terms used herein.

INDUSTRIAL-NETWORK-SECURITY-SYSTEMS_BR_INIT_MBB_0516_A_AG