

TWR LED ALO

Wall Pack Luminaires

Familiar Design. Versatile Lumens.

The classic TWR LED glass wall packs come with adjustable light output (ALO) technology. TWR LED dials in to desired output to match the needs of any job site, and saves significant energy costs when replacing traditional metal halide sources.

Its energy-efficient LEDs have an expected service life of more than 20 years, which eliminates frequent lamp and ballast replacements associated with traditional technologies. Cost effective, flexible, and always in stock—TWR LED is the choice for a wide range of outdoor applications.

Key Features:

- TWR1 ALO delivers 1,000 to 6,200 lumens, TWR2 ALO delivers 3,050 to 11,800 lumens
- Energy savings of 85% vs. comparable metal halide sources; saves up to \$210 per luminaire, per year when replacing a 400W metal halide lamp
- Energy-efficient, up to 145 LPW
- 20+ years expected service life

TWR LED ALO			
Model	Input Watts	Lumen Output	Metal Halide Replacement
TWR1 LED ALO	9W-51W	1,000-6,200	70W-250W
TWR2 LED ALO	21W-87W	3,050-11,800	150W-400W



TWR2 LED ALO



TWR1 LED ALO



Quick Facts:


- DLC listed
- Available in 4000K and 5000K CCT
- MVOLT photocell available
- 347V option available with or without photocell

TWR LED Wall Packs

Use ALO to Dial to Your Lumen Specification:

Dial in the lumens you need through a rotary switch located inside of the luminaire.

ALO Selection Rotary Switch

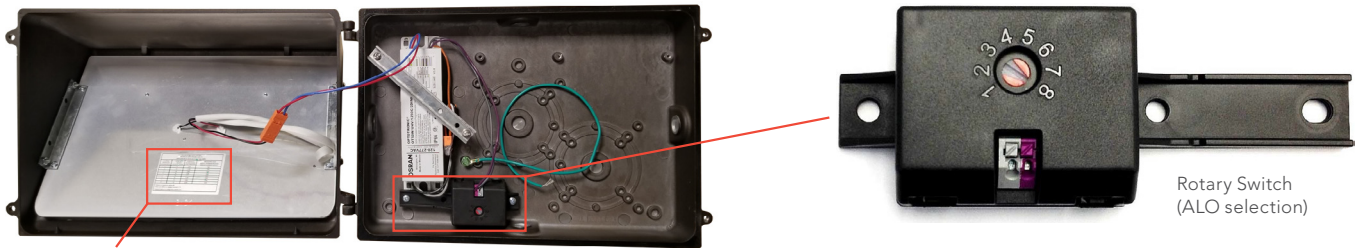

ALO settings table in the luminaire for easy reference during installation

TWR1 Field Adjustable Output Settings

ALO Setting	Input Power	Lumen Output	Replaces Metal Halide
1	9W	1,000	70W
2	14W	1,700	
3	18W	2,200	
4	24W	3,000	150W
5	29W	3,500	
6	34W	4,100	
7	41W	5,000	175W
8*	51W	6,200	250W

TWR2 Field Adjustable Output Settings

ALO Setting	Input Power	Lumen Output	Replaces Metal Halide
1	21W	3,050	150W
2	31W	4,400	175W
3	41W	5,600	250W
4	51W	7,100	
5	61W	8,200	
6	71W	9,300	400W
7	82W	10,350	
8*	87W	11,800	

*Luminaire shipped with default setting #8, which represents maximum lumen output

Family of Glass Wall Packs with ALO Technology



	TWR1 LED ALO	TWR2 LED ALO	TWH LED ALO	TWP LED ALO
Lumen Output	1,000 to 6,200	3,050 to 11,800	2,100 to 9,200	1,100 to 5,200
Input Power	9W to 51W	21W to 87W	16W to 78W	11W to 48W
LPW	up to 122	up to 145	up to 117	up to 108
DLC	Standard	Premium	Standard	Standard

Visit www.lithonia.com for more information